



Glo Brite® Eco Exit 7000 Series PF50 Exit Signs

Glo Brite® | ecōexit™
zero energy exit signs

Going green does not have to be expensive

| | |
|--------------|-------|
| Job Name: | _____ |
| Type: | _____ |
| Approved By: | _____ |
| Distributor: | _____ |

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Recycleable
- LEED points qualified

TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"
 Letter size: 7/8" stroke with 7" height
 Background: Black, Red, Green
 Illumination: High Visibility Green
 Visibility: 50 feet
 Directional: (2) Chevron arrows included for easy direction selection
 Construction: ABS plastic with photoluminescent panel
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;
 Meets NFPA Life Safety Code 101 and OSHA requirements;
 International Building Code 2007 Supplement

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:



NO additional electrical or mechanical source required

INSTALLATION:


Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level
 Life Expectancy 25+ years

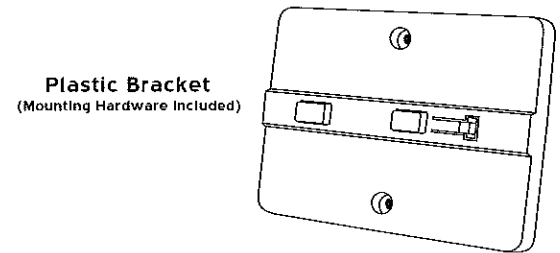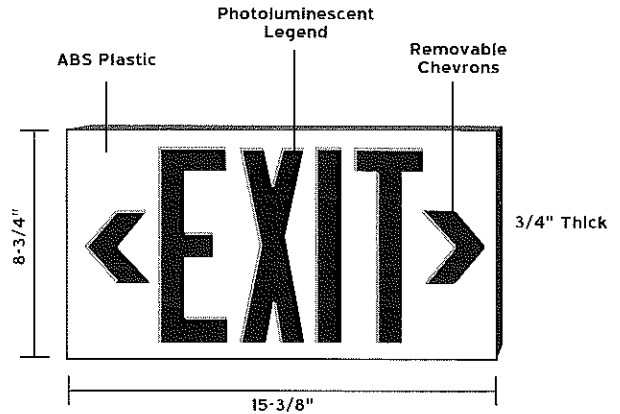

Flag Mount Option



Ceiling Mount Option

| Catalog # | Frame Color | No. of Faces | Mounting Bracket |
|---|-------------|------------------|---------------------------------|
| 70 | 6 - Black | 0 - Single Sided | B - Bracket |
| | 5 - Red | 2 - Double Sided | CDT-B - Conduit Bracket |
| | 4 - Green | | |
| 70 | _____ | _____ | - B _____ (fill in for model #) |
| For example: 7062-B (Double sided Black with bracket) | | | |

SORDS ELECTRIC AND CONTROL

24050 COMMERCE PARK • CLEVELAND, OHIO 44122
 CLEVELAND • COLUMBUS • CINCINNATI
 (216) 360-9800 (614) 885-3933 (513) 528-5680



Other photoluminescent components of the Glo Brite® Safety Guidance System include:
 Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,
 Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.