



# Glo Brite® 7000 Series S50 Framed Exit Signs

Glo Brite® | **ecōexit**™  
zero energy exit signs

Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

## FEATURES:

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface, flag or ceiling mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy costs

## TECHNICAL INFORMATION:

Sizes: 8-1/4" x 15-1/4" x 1/4"

Letter size: 7/8" stroke with 7" height

Background: Black, Red, Green or White

Illumination: High Visibility Green

Visibility: 50 feet

Directional: Pop-out chevron arrows for easy direction selection

Construction: .035 steel and a plastic photoluminescent panel

Durability: Explosion-proof for areas requiring explosion-proof exit signage

## TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL; ICC ES # 6040, meeting all current building codes, meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada

**LIFE EXPECTANCY:** 25+ years

## POWER REQUIREMENTS:




NO additional electrical or mechanical source required

## INSTALLATION:

Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

## APPLICATIONS:

Both high-level and low-level

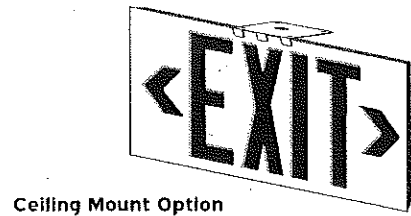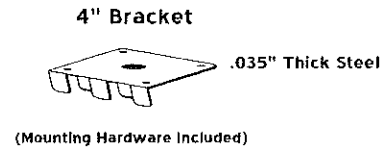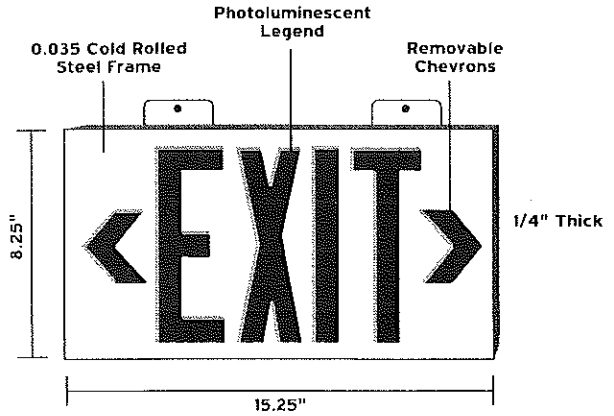

Catalog #	Frame Color	No. of Faces	Mounting Bracket
70	0 - Black	1 - Single Sided	B - Optional for Single Sided Sign Necessary for Double Sided Sign
	1 - Red	2 - Double Sided	
	2 - Green		
	3 - White		
70	_____	_____	(fill in for model #)
For example: 7002-B (Double sided Black with bracket)			

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

## SORDS ELECTRIC AND CONTROL

24050 COMMERCE PARK • CLEVELAND, OHIO 44122  
CLEVELAND • COLUMBUS • CINCINNATI  
(216) 360-9800 (614) 885-3933 (513) 528-5680

