



GFCI In-Line Cord Sets



25080 011-6

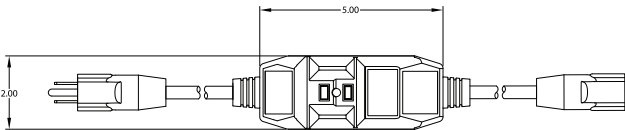

GFCI In-Line Cord Sets

Excellent for industrial plant maintenance, equipment service and construction site applications. Provides compliance with National Electric Code (NEC 2008) Article 590.6 for "Temporary Installations." Applications include:

- ▶ High Pressure Sprayer Washers
- ▶ Drain Snakes
- ▶ Construction Sites
- ▶ Construction Site Power Tools
- ▶ Pumps
- ▶ Industrial Appliances

Rainproof rated, UL listed for outdoor use. Custom cable gauges, lengths and terminations available by special order. To prevent unmonitored equipment startup, manual reset is required after GFCI trip and power outage.

FEATURES

25080 011-6 (2') (i)	25090 001-6 (2') (i)	26000 011-6 (2') (i)
25080 016-3 (6')	25090 006-3 (6')	26000 016-3 (6')
25080 025-2 (25')	25090 025-2 (25')	26000 125-2 (25')
▶ Volts /Amps: 120V/20A	▶ Volts /Amps: 240V/15A	▶ Volts /Amps: 240V/20A
▶ Cord Gauge: 12/3 AWG	▶ Cord Gauge: 14/3 AWG	▶ Cord Gauge: 12/3 AWG
▶ NEMA 5-20 P&R, Black	▶ NEMA 6-15 P&R, Black	▶ NEMA 6-20 P&R, Black
▶ Trip Level: 4-6 mA	▶ Trip Level: 4-6 mA	▶ Trip Level: 4-6 mA
26020 002-6 (2') (i)	26020 011-6 (2') (i)	
*26020 121-6 (2')	*26020 115-6 (2')	
26020 007-3 (6')	26020 016-3 (6')	
26020 124-2 (25')	26020 125-2 (25')	
26020 050-1 (50')	26020 150-1 (50')	
26020 099-1 (100')	▶ Volts /Amps: 120V/15A	
▶ Volts /Amps: 120V/15A	▶ Cord Gauge: 12/3 AWG	
▶ Cord Gauge: 14/3 AWG	▶ NEMA 5-15 P&R, Black	
▶ NEMA 5-15 P&R, Black	▶ Trip Level: 4-6 mA	
▶ Trip Level: 4-6 mA	▶ *Lighted receptacle	
▶ *Lighted receptacle		



TECHNICAL DATA

Grounded Neutral	4 Ohms typical
Trip response time for ground fault and grounded neutral trip	less than 25mS
Voltage surge withstand	3kv ringwave test and 4kv/2kA surge immunity test
Radio frequency noise susceptibility	operates within normal limits with 0.5 volts injected on power line 150kHz-230mHz
Frequency	50 / 60 Hz
Endurance	3,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-35°C to 66°C
Effect of 10 Amp turn DC Shock on ground fault trip	5% maximum trip level variation
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	lighted indicator

