




GFCI Panel Mounts

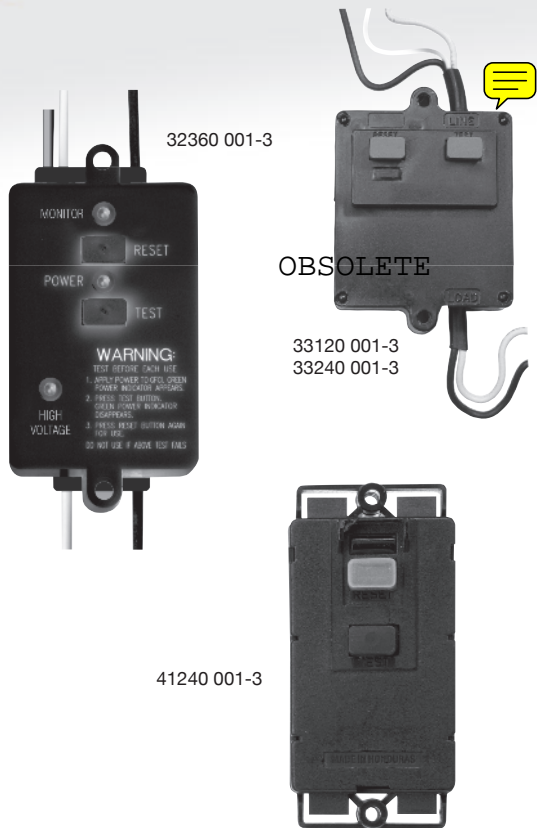

GFCI Panel Mounts

Provides GFCI protection for personnel and equipment when leakage levels have a potentially lethal ground current in excess of 6 milliamperes. Ideal for equipment where mounting applications require panel or bulkhead mount. Applications include:

- ▶ Control Panels
- ▶ Pumping Systems
- ▶ Test Beds
- ▶ Appliances

Automatic reset on power restoration following disruption of primary power. 41240-001 is manual reset.

FEATURES

32360 001-3

- ▶ Volts/Amps: 120V/20A
- ▶ L & N - 12 AWG
- ▶ Trip Level: 4 - 6 mA

41240 001-3

- ▶ Volts/Amps: 120V/20A
- ▶ Trip Level: 4 - 6 mA
- ▶ Manual Reset



33120 001-3

- ▶ Volts/Amps: 120V/20A
- ▶ L & N - 12 AWG
- ▶ Trip Level: 4 - 6 mA

33240 001-3


- ▶ Volts/Amps: 240V/20A
- ▶ L & N - 12 AWG
- ▶ Trip Level: 4 - 6 mA




TECHNICAL DATA

Grounded Neutral (33120 only)	4 Ohms typical
Trip response time for ground fault and grounded neutral trip	less than 25ms
Voltage surge withstand	3kv ringwave test and 4kv/2KA surge immunity test
Radio frequency noise susceptibility	operates within normal limits with 0.5 volts injected on power line 150kHz-230mHz
Frequency	50 / 60 Hz
Endurance	3,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-35°C to 66°C
Effect of 10 Amp turn DC Shock on ground fault trip	5% maximum trip level variation
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	lighted indicator

32360-001

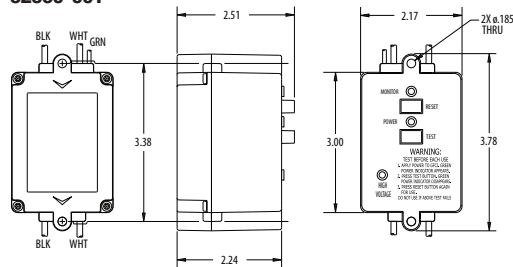

33120 001-3
33240 001-3

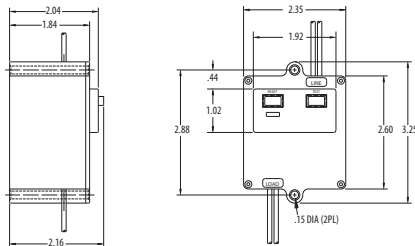

41240-001

